


# Comparison of Application of AERMOD and ISCST3 Models for Simulating the Dispersion of Emitted Pollutant from the Stack of an Industrial Plant in Different Time Scales

Mehrshad Bajoghli<sup>1</sup>

<sup>1</sup>MSc in Environmental Science, Isfahan (Khorasgan) Branch, Islamic Azad University, Isfahan, Iran 

## Abstract

**Background:** One of the main parts of air quality management is known as modeling of atmospheric pollutants. In this regards, simultaneous application of several models in a project and comparing the results obtained from these models could have been a considerable contribution to air quality managers for taking a more efficient decision. **Methods:** In this study, the stack of an industrial plant in the southwest of Isfahan was selected as the emission source and the total suspended particles emitted from this stack was simulated by applying AERMOD and ISCST3 view models (version 8.2). In this vein, the modeling process was conducted using MM5 meteorological data in a 50×50 km extent with 2000 m network distance for each of the models in 1-h, 24-h term averages (short term averages) and monthly and annual periods (long term averages) at ground level concentrations (GLC). **Results:** Results indicated that the highest simulated concentration for both models occurred in a 2000 meters' distance in the east of the stack. Moreover, the highest simulated concentration applying AERMOD was lower than that of applying ISCST3 in all term averages which is due to existing differences between applied algorithms in these two models. **Conclusion:** Consequently, applying AERMOD due to the use of more advanced and up-to-date algorithms have priority over ISCST3 model. Applying ISCST3 can also be useful for small projects that require less input data compared to the AERMOD.

**Key words:** AERMOD; ISCST3; Modeling; Concentration

## Introduction

Since the problems regarding air quality considered as being on constant growth, the need to find manners for understanding and simplifying this complexity is of utmost importance,<sup>1</sup> Planning on pollution strategies depends significantly

on authentic information about air quality and operational scenarios that may occur in the future. Air quality modeling as a convenient tool is capable of providing this information in an understandable and applicable form and is becoming an integral part in

**Citation:** Bajoghli M. Comparison of Application of AERMOD and ISCST3 Models for Simulating the Dispersion of Emitted Pollutant from the Stack of an Industrial Plant in Different Time Scales. Archives of Occupational Health. 2019; 3(1): 245-51.

**Article History:** Received: 6 August 2018; Revised: 1 November 2018; Accepted: 24 November 2018

**Copyright:** ©2017 The Author(s); Published by Shahid Sadoughi University of Medical Sciences. This is an open-access article distributed under the terms of the Creative Commons Attribution License (<https://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

comprehensive environmental assessments.<sup>2</sup> In this regard, by applying mathematical algorithms known as numerical models; physiochemical process affecting concentration, reaction and dispersion of pollutants in atmosphere are simulated by receiving a variety of input data, including meteorological data, emission rate, topography and etc.<sup>3,4</sup> Predicting spatial-temporal concentrations of pollutants resulted from different sources is an important issue.<sup>2</sup> Assessing the dispersion of atmospheric pollutant emitted from dangerous industrial sources and the relevant risks for the population is of great importance as well.<sup>5</sup> The Gaussian air dispersion models, as the most common and most recognized ones in the field of air dispersion modeling in past decades, can still be applied to accomplish this goal.<sup>6-8</sup> In such models, in addition to the manner that pollutant is dispersed in the air, the concentration of emitted pollutant released from a source can be determined in different time and space intervals.<sup>9</sup>

AERMOD is an advanced and highly applied plume dispersion model which has been updating on constant basis. This model jointly developed by American meteorological society and EPA was replaced by ISTCST3 in 1991. After 15 years, in 2006, it was

introduced as the preferred regulatory model by EPA.<sup>9-12</sup> Although AERMOD is considered as the latest model of EPA, application of ISCST3 due to its simplicity, low requirement of various input data and its good results in comparison with other air dispersion models could still be beneficial.<sup>13</sup> The objective of this study is to apply both the AERMOD and ISCST3 for simulating the total suspended partides emitted from stack of an industrial plant in Isfahan and comparing the obtained results of these models.

**Methods**

**Study area**

In this study, the flue-gas stack of a steel plant located in the south of Isfahan was chosen for the modeling process Figure 1. This plant with 3000 tons capacity per year was launched in 1995 and is located in the km 55 of the road Isfahan to Mobarakeh. Manufactured products of this plant, after going through different processes in various units, are used in many industries including oil, gas, petrochemical, power plants, automotive, and etc. Topographical and meteorological features of the area calculated as 1670 from mean sea level, Figure 2, the average temperature of 12 ° C and wind speed of 2.5 m/s.

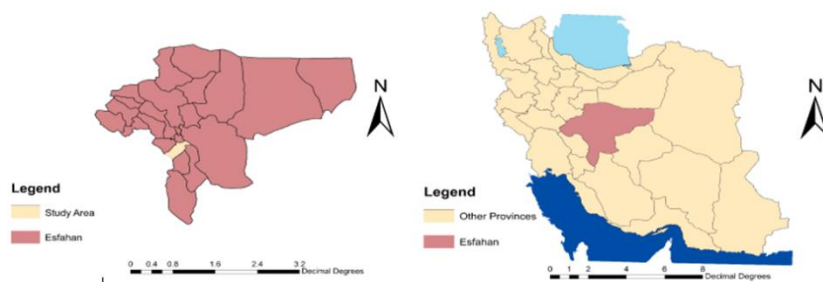


Figure 1. Geographical location of the study area

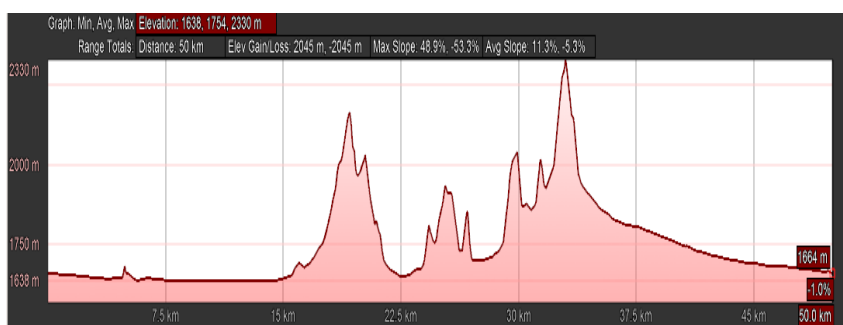


Figure 2. Elevation changes in 50 km radius

### Adopting the AERMOD model

In order to run AERMOD model, required meteorological data of MM5 type were purchased from Lake Environmental Company in Canada ([https://www.weblakes.com/services/met\\_data.html](https://www.weblakes.com/services/met_data.html)). Hourly data were completed with SAMSON and TD6201 formats for March 21st, 2014 to March 21st, 2015 and 32°35' N and 51°61' E geographical coordinates were directly imported to AERMET preprocessor without any modification. Produced wind rose containing common meteorological data between two models was calculated by the frequency that the wind blows from a particular direction per unit of time,<sup>14</sup> Figure 3. Afterwards the three parameters of Bowen ratio, Albedo and surface roughness according to type of the land use around the steel plant were divided to four sectors of cultivated land, desert shrub land, urban and cultivated land where each of the three mentioned parameters were determined on an annual basis with respect to, Table 1.

After being done with AERMET preprocessor, in order to determine the receptors size, a uniform Cartesian grid with 50×50 km extent and 2000


meters network distance was defined and having determined the emission coefficients of the TSP for flue-dust stack which was obtained by Durag F-701-20 portable device for the same time period, was set at center of this network. It should be mentioned that, this stack was the only emission source of the study. Finally, to assess the terrain effects on pollutant dispersion, a global SRTM3 90 m was imported to AERMAP preprocessor.

### Adopting the ISCST3

In order to run ISCST3 model, only the meteorological preprocessor of this model (PCRAMMET) was applied and other common parameters between this model and AERMOD were accepted with no change. In this respect, only the SAMSON file of the MM5 meteorological data was applied as the surface data and to estimate the mixing height parameter which is one of the required parameters in this preprocessor (PCRAMMET), anemometer height of 13m, Albedo of 0.3275, Bowen ratio of 4.75 and surface roughness of 0.2625 were determined. At the end, after running this preprocessor, the ISCST3 model was run completely.

**Table 1.** Surface parameters used in AERMET preprocessor

| Sector | Start | End | Land use type     | Albedo | Bowen ratio | Surface roughness |
|--------|-------|-----|-------------------|--------|-------------|-------------------|
| 1      | 0     | 50  | Cultivated land   | 0.28   | 0.75        | 0.07              |
| 2      | 50    | 250 | Desert shrub land | 0.33   | 4.75        | 0.26              |
| 3      | 250   | 320 | Urban             | 0.21   | 1.62        | 1.00              |
| 4      | 320   | 0   | Cultivated Land   | 0.28   | 0.75        | 0.07              |

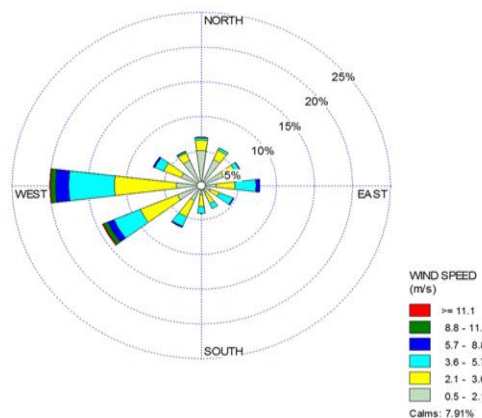


**Figure 3.** Produced wind rose with common meteorological data between two models


**Results**

The wind rose plot produced by using MM5 meteorological data, considered as input meteorological data for both models, is shown in


Figure 3. After running both models in full, the obtained results of highest simulated values of these models were determined in contour plot files for short and long term averages, Figure 4 to 11.

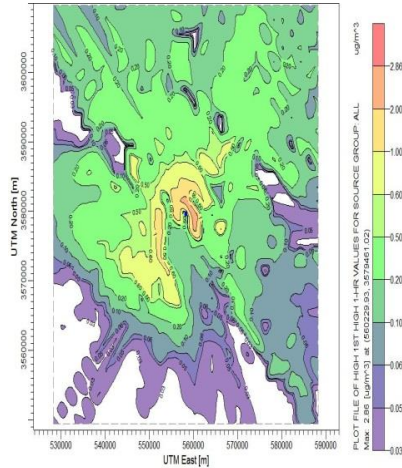


**Figure 5.** 1 hour average concentrations Using AERMOD

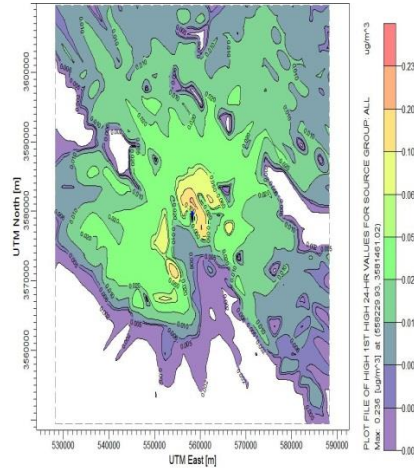


**Figure 4.** 24 hour average concentrations Using AERMOD

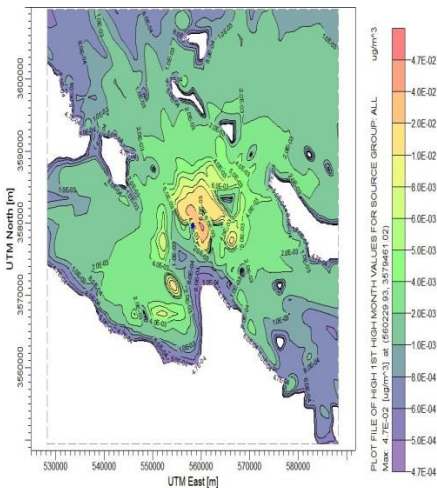


**Figure 7.** Monthly average concentrations Using AERMOD

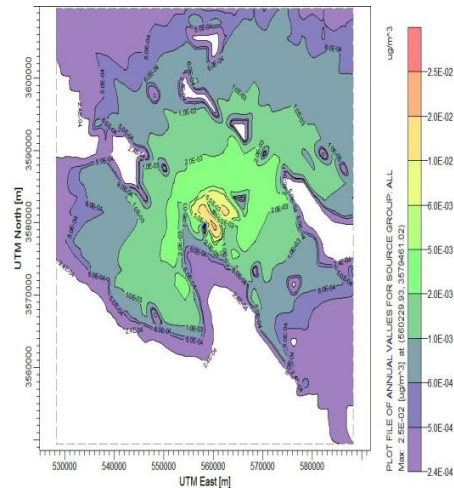

**Figure 6.** Annual average concentrations using AERMOD

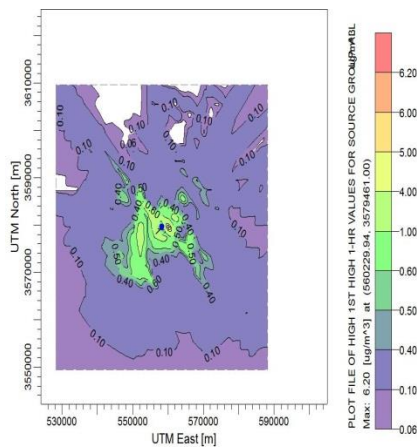

**Figure 9.** 1 hour average concentrations Using ISCST3

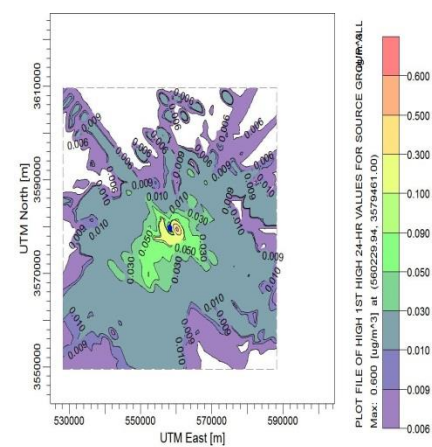

**Figure 8.** 24 hour average concentrations using ISCST3

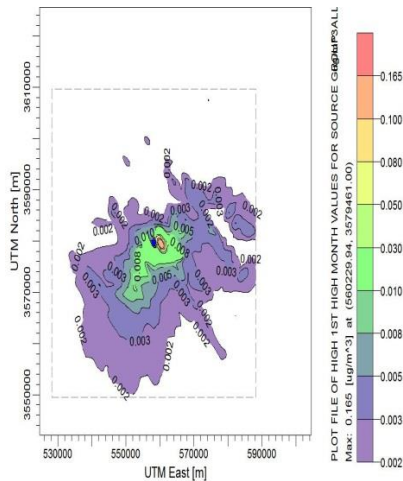


Figure 11. Monthly average concentrations Using ISCST3

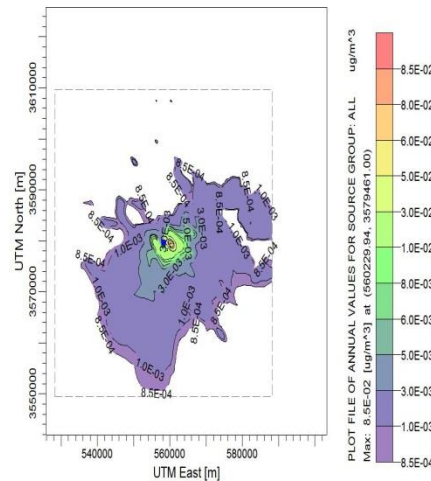


Figure 10. Annual average concentrations using ISCST3

**Comparing the highest simulated concentrations obtained through both models**

According to Figure 4-11, with respect to direction and distance of highest concentrations as expressed in Tables 2 and 3, the highest simulated concentrations for both models in all term averages have occurred in 2000 meters distance from the stack in the east, which is in line with west-east prevailing wind in this region,

Figure 2. However, the most obvious difference between the obtained results is recognized in the amount of concentrations indicating that the simulated concentrations by AERMOD in all term averages are less than that of the ISCST3. The main reason for this is in the difference between employed algorithms in these two models, Figure 12.

Table 2. The maximum simulated concentration by AERMOD

| Direction | Distance from electric arc furnace stack (km) | Coordinate Y(UTM) | Coordinate X(UTM) | Concentration $\mu\text{g}/\text{m}^3$ | term average |
|-----------|---|-------------------|-------------------|--|--------------|
| East      | 2   | 3579461/02        | 560229/93         | 2/86                                   | 1h           |
| East      | 2   | 3579461/02        | 560229/93         | 0/24                                   | 24h          |
| East      | 2   | 3579461/02        | 560229/93         | 0/05                                   | Monthly      |
| East      | 2   | 3579461/02        | 560229/93         | 0/02                                   | Annual       |

Table 3. The maximum simulated concentration by ISCST3

| Direction | Distance from electric arc furnace stack (km) | Coordinate Y (UTM) | Coordinate X (UTM) | Concentration $\mu\text{g}/\text{m}^3$ | Time average |
|-----------|---|--------------------|--------------------|--|--------------|
| East      | 2   | 3579461            | 560229/94          | 6/20                                   | 1h           |
| East      | 2   | 3579461            | 560229/94          | 0/60                                   | 24h          |
| East      | 2   | 3579461            | 560229/94          | 0/16                                   | Monthly      |
| East      | 2   | 3579461            | 560229/94          | 0/08                                   | Annual       |

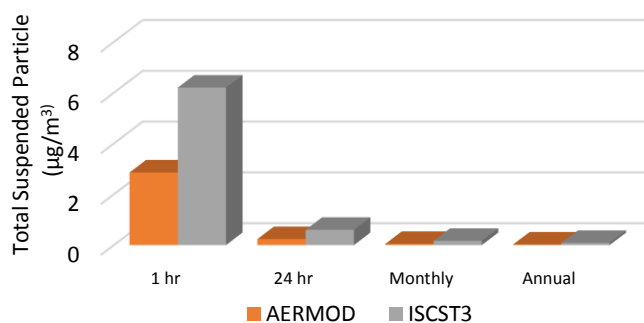


Figure 12. Comparison of simulated concentrations with AERMOD and ISCST3

## Conclusion

In this study, in order to simulate the dispersion of emitted pollutant from the stack of an industrial plant in the south of Isfahan, AERMOD and ISCST3 were used as the two dispersion model. According to the obtained results, the highest simulated concentrations for both models predicted at the 2000 meters distance from the stack in the east which is in the direction of prevailing wind in the region. Moreover, due to the differences and applications of more advanced algorithms in AERMOD, the highest simulated concentrations are recognized as lower than the ones found by ISCST3 in all term averages. In fact, applying AERMOD leads to under prediction while applying ISCST3 leads to over prediction of concentrations in this study. This observation is consistent with<sup>15,16</sup> and<sup>17</sup> studies as well. However, it is of significant importance to note that, applying different sets of data and parameters for both models could result in different observations. For instance, AERMOD is more sensitive to parameters like changes in albedo, surface roughness, wind speed, temperature, and cloud cover while taking into consideration ISCST3, solar radiation (as it affects stability class) and mixing heights below 160 m have more impact on sensitivity.<sup>18</sup> In addition to this fact, in some scenarios AERMOD could have larger maximum concentrations. For instance, in the annual concentration estimated for the rural setting, tall and squat building with a 100-meter-stack (both nearby to the building and separated from the building). Such results can only be attributed to variations in the dispersion algorithms within the two models.<sup>19</sup>

Finally, it should be mentioned that, in the field of air quality modeling, no model can be considered as the most complete one due to the variety in the model types, their functionality and restrictions. It is realized that the applying large number of input data and complex algorithms does not necessarily mean that given model is known as completely perfect, while increasing input data can increase the amount of uncertainty in a model. In general, a modeler should

select a model with a complete understanding of various types of models and consider the priorities and required parameters of a project.

## Conflict of interest

The authors did not report any contradiction of interests.

## Acknowledgments

The author would like to thank Mr. Haidouk Vartevan for proofreading this article.

## References

- 1- Watkins T, Williams R, Vette A, Burke J, George BJ, Isakov V. Air Pollution Modeling and Its Application XIX. The Importance of Exposure in Addressing Current and Emerging Air Quality Issues. US: springer; 2008.P:640647
- 2- Kesarkar AP, Dalvi M, Kaginalkar A, Ojha A. Coupling of the weather research and forecasting model with aermოდ for pollutant dispersion modeling. a case study for pm10 dispersion over pune, India. Atmospheric environment. 2007;41(9):1976-88
- 3- Vallero DA. Fundamentals of Air Pollution. 4th ed. Burlington: Academic Press; 2008.
- 4- Gurjar BR, Molina LT, Ojha CSP. Air Pollution: Health and Environmental Impacts. CRC Press Florida; 2010.
- 5- Caputo M, Giménez M, Schlamp M. Intercomparison of atmospheric dispersion models. Atmospheric Environment. 2003; 37(18):2435-49.
- 6- Vannucci M, Valentina C, Haines N. Air dispersion modeling for the assessment of ULCOS technologies. Metallurgical Research & Technology Formerly Revue de Métallurgie. 2009;106(9):357-62.
- 7- Collett RS, Oduyemi K. Air quality modelling: a technical review of mathematical approaches. Meteorological applications. 1997;4(3):235-246.
- 8- Modi M, Venkata Ramachandra P, Liyakhath Ahmed SK, Zakir H. A Review on theoretical air pollutants dispersion models. International journal of pharmaceutical, Chemical and Biological Sciences. 2013;3(4):1224-30.
- 9- Morselli M, Ghirardello D, Semplice M, Raspa G, Di Guardo A. Integration of an atmospheric dispersion model with a dynamic multimedia fate model: development and illustration. Environmental pollution. 2012;164:182-7.
- 10- Afzali A, Rashid M, Noorhafizah K, Amar M. Evaluating human exposure to emission from incineration plant using AERMOD dispersion modeling. Iranian journal of public health. 2015; 43(3):25-33.
- 11- Haynes EN, Heckel P, Ryan P, Roda S, Leung YK, Sebastian K, et.al. Environmental manganese exposure in residents living near a ferromanganese refinery in Southeast Ohio: a pilot study. Neurotoxicology. 2010;31(5):468-74.
- 12- Rood AS. Performance evaluation of AERMOD, CALPUFF, and legacy air dispersion models using the Winter Validation Tracer Study dataset. Atmospheric environment. 2014;89: 707-20.

- 13- Sax T, Isakov V. A case study for assessing uncertainty in local-scale regulatory air quality modeling applications. *Atmospheric Environment*. 2003;37(25):3481-9.
- 14- Mulukutla ANV, Varghese GK. Comparison of field monitored and prognostic model generated meteorological parameters for source dispersion modeling. *Modeling Earth Systems and Environment*. 2015;1(4):39.
- 15- Hanna SR, Egan BA, Purdum J, Wagler J. Evaluation of the ADMS, AERMOD, and ISC3 dispersion models with the OPTEX, Duke Forest, Kincaid, Indianapolis and Lovett field datasets. *International Journal of Environment and Pollution*. 2001;16(1-6):301-14.
- 16- Orloff KG, Kaplan B, Kowalski P. Hydrogen cyanide in ambient air near a gold heap leach field: Measured vs. modeled concentrations. *Atmospheric Environment*. 2006;40(17):3022-9.
- 17- Kalhor M, Bajoghli M. Comparison of AERMOD, ADMS and ISC3 for incomplete upper air meteorological data (case study: Steel plant). *Atmospheric pollution research*. 2017; 8(6):1203-8.
- 18- Faulkner WB, Shaw BW, Grosch T. Sensitivity of two dispersion models (AERMOD and iscs3) to input parameters for a rural ground-level area source. *The Air & Waste management association*. 2008;58(10):1288-96.
- 19- EPA. Comparison of regulatory design concentrations: Aermom versus iscs3 and ctdmplus. 2003.