

Identification and Ranking of Noise Control Solutions by Using Fuzzy Delphi approach, Fuzzy Analytic Hierarchy Analysis (FAHP) and Fuzzy Vikor in an Oil Refinery

Seyed Mahdi Mousavi¹, Mahsa Jahadi Naeni², Saeid Yazdani Rad³, Mojtaba Haghghat^{4*}

¹Department of Occupational Health Engineering, School of Public Health, Tehran University of Medical Sciences, Tehran, Iran • ²Department of Occupational Health Engineering, School of Public Health, Isfahan University of Medical Sciences, Isfahan, Iran • ³School of Public Health, Shahrekord University of Medical Sciences, Shahrekord, Iran • ⁴Department of Occupational Health Engineering, Behbahan Faculty of Medical Sciences, Behbahan, Iran • *Corresponding Author: Mojtaba Haghghat, E-mail: mo.haghghat1988@gmail.com, Tel: +98-936-2003916

Abstract

Background: The study aimed of this study was to identify and ranking noise control solutions by using fuzzy Delphi approach and Fuzzy Analytic Hierarchy Analysis (FAHP) and Fuzzy Vikor method in an oil refinery. **Methods:** This descriptive-analytical study was conducted in the catalytic conversion unit in an oil refinery. First, noise measurement was performed based on the standard to identify the sources of noise generating factors. Second, the criteria and initial solutions were identified by reviewing the texts and conducting interviews with experts and the most significant criteria and solutions for noise control were selected using the fuzzy Delphi method. Then, the criteria were weighed using the fuzzy analytic hierarchy method. Finally, the control solutions were prioritized using fuzzy Vikor method. **Results:** The results of FAHP method indicated that cost with final weight (0.27) had the highest weight and non-interference in the process with final weight (0.11) had the lowest weight among the identified criteria. The ranking of noise control solutions with fuzzy Vikor method indicated that the construction of an acoustic room for workers exposed to weights ($Q = 0$) as the most appropriate solution for noise control and the method of modifying or changing the work process with the final weight ($Q = 1$) is the last noise control solution among the solutions identified in the studied refinery. **Conclusion:** The use of multi-criteria decision-making methods in selecting the appropriate solution for noise control can overcome the uncertainties in making an appropriate decision for selecting the best solution for noise control. In this study, a decision model was introduced for selecting the most appropriate noise control solution based on different criteria and this model can be used in other industries which should select a noise control solution.

Keywords: Noise control; Prioritization; Catalytic conversion unit; Fuzzy AHP; Fuzzy Vikor

Introduction

Noise is one of the most significant and common pollutants in the workplace and is caused by human activities. Developments in technology and the expansion of different industries

have made a large number of people in the exposure of unwanted noise.¹ Exposure to noise can result in a range of adverse physiological and psychological effects such as hearing loss, hypertension,

Citation: Mousavi SM, Jahadi Naeni M, Yazdani Rad S, Haghghat M. Identification and Ranking of Noise Control Solutions by Using Fuzzy Delphi approach, Fuzzy Analytic Hierarchy Analysis (FAHP) and Fuzzy Vikor in an Oil Refinery. Archives of Occupational Health. 2021; 5(1): 913-20.

Article History: Received: 03 November 2020; Revised: 27 November 2020; Accepted: 02 January 2021

Copyright: ©2021 The Author(s); Published by Shahid Sadoughi University of Medical Sciences. This is an open-access article distributed under the terms of the Creative Commons Attribution License (<https://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

cardiovascular diseases, sleep disturbance, irritation, and distraction among the exposed individuals.^{2, 3} Exposure to unwanted noise exists in many different occupations including steel, textile, power plant, and oil industry.^{4, 5} A study by Mousavi and Dehghan indicated that there is noise pollution in some refinery units and the need for noise control should be regarded for preventing the adverse effects.^{6, 7} The need to have a noise control program in the workplace is felt due to the high costs and adverse consequences of exposure to noise.^{8, 9} In order to control noise, different control solutions such as controlling the noise at the source, controlling the noise at the source path, and controlling the noise at the receiving point have been recommended. In different conditions, some of these measures have a better efficiency, but a combination of these measures are often used for reducing the noise pressure level to the recommended standard range.^{10, 11}

Making decision on to select the best noise control solution is one of the most fundamental issues which has always been considered by experts and professional safety and health experts. Due to the limited organizational resources and diverse noise control solutions, selecting a noise control solution from several solutions is highly significant. The use of multiple criteria decision models (MCDM) is suggested for selecting one solution from several existing solutions.¹² Analytical hierarchy process is one of the most widely used multi-criteria decision making methods, helping decision makers to set priorities based on their goals, knowledge, and experience and fully considering their feelings and judgments.¹³ Since decision makers cannot often express definite judgments on priorities due to their fuzzy nature and uncertainty, using fuzzy logic in the hierarchical analysis method was formed.¹⁴ Vikor means multi-criteria optimization and compromise solution and was introduced for the first time in 1998 by Oprikovich. This method was developed by Zheng in 2002 for the multi-criteria optimization of complex

systems. VIKOR focuses on categorizing and selecting from a set of options and determines solutions for a problem with conflicting criteria, so that it can help decision makers made the final decision.

Using this method during the recent years has been considered as a method of solving multiple decision-making problems and used in various studies.^{15, 16} Due to the significance of noise control to prevent its adverse consequences in individuals, it is necessary to adopt an appropriate noise control solution.¹¹ Since it is not possible to test all control solutions and making decisions on the selection of the best noise control solution by considering all criteria and solutions due to the variety of technical and economic criteria effective in choosing a noise control solution, thus it is beneficial to use multi-criteria decision making methods for selecting a noise control strategy. Thus, this study aimed to identify and prioritize noise control solutions using fuzzy Delphi method and FAHP-fuzzy vikor method in an oil refinery.

Methods

The present study was a descriptive-analytical study being conducted in 2019 in the catalytic conversion unit of an oil refinery in southern Iran. This study was a type of problem solving and multi-criteria decision making based on group decision making. At the beginning of the study, a list including 25 available academic and industrial experts was prepared. In this study, academic experts with a doctoral degree in occupational health and mechanics with a history of research related to noise control, as well as academic experts among industrial experts with more than 10 years of experience in noise control methods in the industry were selected. Then, seven criteria and 12 control solutions which can be used in the refinery were extracted by reviewing the texts and conducting interviews with available experts. Then, fuzzy Delphi method was used for determining the final criteria and solutions.¹⁷ Determining criteria and solutions for noise control using fuzzy Delphi method

Steps of fuzzy Delphi method are shown in figure 1. First, an anonymous questionnaire was sent to the team of experts who were asked to show the relevance of the identified initial criteria with the main research subject. The screening and the importance of each factor using the linguistic variables are shown in Table 1.

Table 1. Linguistic expressions used in the fuzzy Delphi method and their range of importance

Score of the range of importance	Linguistic expressions
1	Very low
2	Low
3	Average
4	High
5	Very high

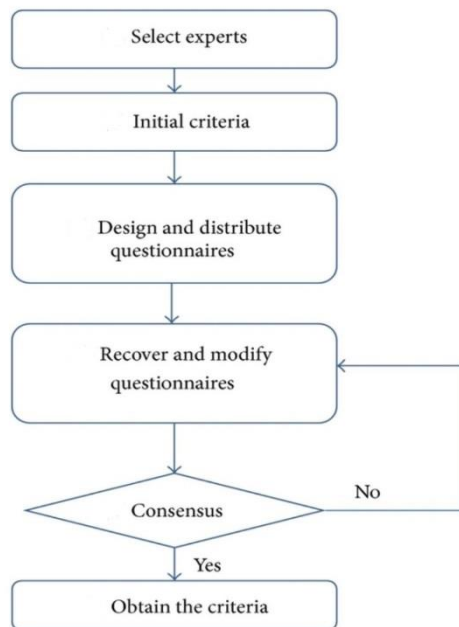


Figure 1. Steps of fuzzy Delphi method

In order to aggregate the experts' opinions, the mathematical relations governing fuzzy numbers were used. It is assumed that the linguistic expression of criterion *j* from the point of view of expert *i* is number *i* among *n* experts $W_{ij} = [a_{ij}, b_{ij}, c_{ij}]$ that the value of *j* equals *j* = 1, 2,3,... *m* and the value of *i* equals *i* = 1,2,3,... *m*.

Thus, the fuzzy value of the criterion *j* is calculated from the following equation, which equals $W_j = [a_j, b_j, c_j]$.

$$a_j = \min \quad \text{Equation (1)}$$

$$b_j = \frac{1}{n} \sum_{i=1}^n b_{ij} \quad \text{Equation (2)}$$

$$c_j = \max \quad \text{Equation (3)}$$

Then, Eq. 4 was used for defuzzification.

$$S_j = \frac{a_j + b_j + c_j}{3} \quad i=1, 2, 3, \dots, m \quad \text{Equation (4)}$$

A number of 18 questionnaires were completed by experts and calculations were conducted based on the participation of 18 experts in the study. In addition, the condition of consensus or agreement of experts was realized when 70% of the experts gave the same answer to one of the options for each criterion.¹⁸

Determining the weight of criteria using the fuzzy analytic hierarchy analysis

In order to determine the weight of the criteria specified in this study, the fuzzy analytic hierarchy was used. The analytic hierarchy analysis was presented for the first time by Chang.¹⁹ In this method, decisions were made on a specific case in order to aggregate the experts' opinions and also weighing was performed using a series of triangular fuzzy numbers. In order to weigh the opinion of experts and make comparisons between the criteria, linguistic terms and triangular fuzzy numbers presented in Table 2 were used. A questionnaire was provided to the experts and they were asked to compare the criteria in pairs and determine the degree of importance of the two criteria in relation to each other using linguistic terms.

Table 2. Linguistic scale and its corresponding fuzzy numbers used in pairwise comparisons

triangular fuzzy numbers	Linguistic term of relative importance	Degree of importance
(8, 9, 10)	Perfect	8
(7, 8, 9)	Absolute	7
(6, 7, 8)	very good	6
(5, 6, 7)	Fairly Good	5
(4, 5, 6)	preferable	4
(2, 3, 4)	Not bad	3
(1, 2, 3)	weak advantage	2
(1, 1, 1)	Equal	1

Table 3. Linguistic variable and its corresponding numerical value used in Vikor method

Row	Linguistic variable	numerical value
1	Very poor	(1,1,2)
2	poor	(2,3,4)
3	Relatively good	(4,5,6)
4	good	(6,7,8)
5	perfect	(8,9,10)

In order to combine the experts' opinions, the geometric averaging technique was used, the output of which was a comparison matrix which was the result of experts' judgments (K= number of experts) based on Eq. 5.

$$a_{ij} = (\prod_{k=1}^k \tilde{a}_{ijk})^{\frac{1}{k}} \quad k = 1,2 \dots k \quad \text{Equation (5)}$$

Then, S_i which represents a triangular fuzzy number was calculated using Eq. 2 for each row of pairwise comparisons.

$$S_i = \sum_{j=1}^m M_{gi}^j \otimes \left[\sum_{l=1}^n \sum_{j=l}^m M_{gi}^j \right]^{-1} \quad \text{Equation (6)}$$

In this equation, i represents the number of row, j represents the column number, and M_{gi}^j represents the fuzzy numbers of pairwise matrices. Values of $\left[\sum_{l=1}^n \sum_{j=l}^m M_{gi}^j \right]^{-1}$, $\sum_{l=1}^n \sum_{j=l}^m M_{gi}^j$, $\sum_{j=1}^m M_{gi}^j$ were calculated using Eqs. 7, 8, and 9.

$$\sum_{j=1}^m M_{gi}^j = (\sum_{j=1}^m l_j \cdot \sum_{j=1}^m m_j \cdot \sum_{j=1}^m u_j) \quad \text{Equation (7)}$$

$$\sum_{l=1}^n \sum_{j=l}^m M_{gi}^j = (\sum_{j=1}^n l_j \cdot \sum_{j=1}^n m_j \cdot \sum_{j=1}^n u_j) \quad \text{Equation(8)}$$

$$\left[\sum_{l=1}^n \sum_{j=l}^m M_{gi}^j \right]^{-1} = \left(\frac{1}{\sum_{i=1}^n u_i} \cdot \frac{1}{\sum_{i=1}^n m_i} \cdot \frac{1}{\sum_{i=1}^n l_i} \right) \quad \text{Equation (9)}$$

After that, the degree of magnitude of the S_i obtained in the previous step was calculated relative to each other using Eq. 10.

$$V(M_2 \geq M_1) = \text{hgt}(M_1 \cap M_2) = \mu_{M_2}(d) = \begin{cases} 1 & \text{if } m_2 \geq m_1 \\ \frac{l_1 - u_2}{(M_2 - u_2) - (m_1 - l_1)} & \text{if } l_1 \geq u_2 \\ \text{other wise} & \end{cases} \quad \text{Equation (10)}$$

Then, the non-normalized weight of the criterion was calculated using Eqs. 11 and 12 of and finally the final normalized weight was calculated using Eq. 13.²⁰

$$\hat{d}(A_i) = \text{Min } V(S_{i \geq S_k}) \quad k= 1,2, \dots, n, \quad k \neq i \quad \text{Equation(11)}$$

$$w' = (\hat{d}(A_1) \cdot \hat{d}(A_1) \dots \hat{d}(A_n))^T \quad A_l = (i= 1,2, \dots, n) \quad \text{Equation(12)}$$

$$w = d(A_1) \cdot d(A_1) \dots d(A_n))^T \quad \text{Equation (13)}$$

Selecting the most appropriate noise control solution using fuzzy Vikor method

After determining the weight of the criteria by using FAHP, the fuzzy Vikor method was used for prioritizing and selecting the most appropriate noise control solution.²¹ At this step, the experts were asked to express their opinions on the extent to which each criterion was met by a specified solution based on linguistic terms.

The evaluation matrix was formed using the average opinions of experts and the values of the best and worst values for each positive index (profit) were determined.

$$i = 1,2, \dots, n \quad \tilde{f}_j = \text{Max}_i \tilde{f}_{ij} \quad \text{Equation (14)}$$

$$i = 1,2, \dots, n \quad f_j^\circ = \text{Min}_i \tilde{f}_{ij} \quad \text{Equation (15)}$$

If $f_j^{\sim*} = (l_j^\circ, m_j^\circ, r_j^\circ)$ and $f_j^{\sim\circ} = (l_j^\circ, m_j^\circ, r_j^\circ)$ are two fuzzy numbers for normalizing the positive index of profit, Eq. 16 was used while Eq. 17 was used for the negative index (cost).

$$\tilde{d}_{ij} = \frac{f_j^{\sim*} \ominus f_j^{\sim\circ}}{r_j^{\sim*} - l_j^{\sim\circ}} \quad \text{Equation (16)}$$

$$\tilde{d}_{ij} = \frac{f_j^{\sim\circ} \ominus f_j^{\sim*}}{r_j^{\sim\circ} - l_j^{\sim*}} \quad \text{Equation (17)}$$

Then the values of S_j (utility size) and R_j (effect size) for all solutions were calculated using Eqs. 18 and 19.

$$\tilde{S}_i = \sum_{j=1}^j (\tilde{w}_j \otimes \tilde{d}_{ij}) \quad \text{Equation (18)}$$

$$R_i = \text{max}_j (\tilde{w}_j \otimes \tilde{d}_{ij}) \quad \text{Equation (19)}$$

Finally, the final value of Vikor index was calculated using Eq. 20.

$$\tilde{Q}_i = v \frac{(\tilde{s}_j \ominus \tilde{s}^*)}{s^{\circ r} - s^{*l}} \oplus (1 - v) \frac{(\tilde{R}_j \ominus \tilde{R}^*)}{R^{\circ r} - R^{*l}} \quad \text{Equation (20)}$$

In the above equation, Q_j represents the value of the Vikor index and the value of Vikor for the j -th option. v represents a weight for the maximum group utility solution, being usually equal to 0.5.²² The solutions were prioritized based on the increase of Q_j . As the Q_j value is lower, the solution is in priority.²³

Results

The results of fuzzy Delphi method indicated that five criteria and nine noise control solutions could achieve 70% of the consensus of experts and could be considered as the final criteria and solutions for noise control in the present study Table 4.

The criteria were identified by the fuzzy analytic

hierarchy analysis and it was determined that executive cost and cost-effectiveness of the method with a normalized weight of 0.2796 were among the most effective criteria in selecting a noise control solution among the criteria. Other criteria and control solutions as well as the relative and normal weight of each criterion are presented in Table 4.

The weight of the criteria obtained by the fuzzy analytic hierarchy process was used for calculating the final weight of the solutions using the fuzzy Vikor method. The results of Vikor method indicated that the use of acoustic chamber for the individuals exposed to noise as the first priority, the building acoustic chambers on noise generating sources as the second priority, and installing the silencer on airjets as the third priority are among the studied solutions.

Table 4. Criteria and solutions for noise control identified by fuzzy Delphi method

Criterion	Nature of criterion	Percentage of consensus	Noise control solution
Efficiency of method in noise level reduction	Positive	0.88	Using hearing protection devices
Executive cost and cost-effectiveness of the method	Negative	0.90	Controlling the exposure time
Being executable	Positive	0.75	Repairing the defective parts of devices
non-interference in the process	Positive	0.82	Replacing new devices with old ones
Being secure	Positive	0.71	Building an acoustic chamber on noise generating sources
			Installing the silencer on the airjets
			Using vibration dampers to control the vibration of noise generating sources
			Modifying or changing the work process to reduce the steam egression rate
			Building an acoustic chamber for individuals exposed to noise

Table 5. Abnormal and normal weight of the criteria based on weighting with fuzzy analytic hierarchy process

Criterion	Abnormal weight	Normal weight
Being executable	0.8744	0.2445
Executive cost and cost-effectiveness of the method	1.0000	0.2796
Being secure	0.4007	0.1120
non-interference in the process	0.3959	0.1107
Efficiency of method in noise level reduction	0.9053	0.2531

Table 6. Final results of Vikor method and prioritization of noise control solutions based on Q value

Solution	S value			R value			Q value	priority
Using hearing protection devices	0.72	0.61	11.6	0.24	0.24	11	0.98	7
Controlling the exposure time	0.52	0.41	11.4	0.19	0.20	11	0.97	6
Repairing the defective parts of devices	0.83	0.71	11.7	0.24	0.24	11	0.993	5
Replacing new devices with old ones	0.90	0.91	11.8	0.25	0.25	11	0.998	8
Building an acoustic chamber on noise generating sources	0.60	0.46	5.97	0.21	0.18	5.5	0.498	2
Installing the silencer on the airjets	0.68	0.58	6.08	0.21	0.18	5.5	0.503	3
Using vibration dampers to control	0.73	0.62	6.12	0.21	0.20	5.5	0.505	4
Modifying or changing the work process to reduce the steam egression rate	0.94	0.95	11.8	0.27	0.27	11	1	9
Building an acoustic chamber for individuals exposed to noise	0.10	0.12	0.12	0.06	0.06	0.06	0	1

Discussion

Few studies have been conducted on weighting and prioritizing noise control solutions in Iran and other countries and the use of multi-criteria decision-making methods in solving noise-related decision-making problems is a new subject which has been considered. In this study, fuzzy analytic hierarchy method was used for weighing the criteria for noise solution selection and fuzzy Vikor method was used for prioritizing noise control solutions. Vikor method is an effective tool in the multi-criteria decision-making process, when decision makers cannot accurately express their priorities due to inability or lack of knowledge, using this method is regarded highly efficient.²⁴ In fact, the main goal of Vikor method is to be closer to the ideal answer and also the prioritization of solutions is based on this goal.²⁵ The results of fuzzy Vikor method showed that building an acoustic chamber for the individuals exposed to the final weight ($Q = 0$) and building an acoustic chamber on noise generating sources with the final weight ($Q = 0.49$) were identified as the second priority. Due to the open environment of the catalytic conversion unit and the wide range of noise generating sources, it is not possible to enclose all noise generating sources. Thus, according to experts, building an acoustic chamber for the exposed individuals was superior to building an acoustic chamber on noise generating sources.

The solutions such as repairing old devices, replacing new devices with old ones, and changing the process due to high costs were among the last priorities of decision makers, indicating the effect of cost in selecting the method of noise control in industry. According to the experts, using personal protection equipment and time management is less effective than other methods in the field of noise control. The results of fuzzy analytic hierarchy method showed that cost with a final weight of 0.2796 and efficiency of the method with a final weight of 0.1077 had a role in selecting decision

makers. Moradi et al. in their research entitled "Selecting the most appropriate noise control solution in an oil refinery using fuzzy analytic hierarchy method" concluded that the two criteria of cost and efficiency had the maximum relative weight among the considered criteria." In addition, a study by Zare and Shirali indicated that there is a direct linear relationship between efficiency and cost while cost increases with increasing efficiency.^{26, 27} In this study, cost with the final weight of (0.2796) and the efficiency of method with the final weight of (0.2531) were considered as two criteria with relative weight higher than other criteria, indicating the importance of these two criteria in selecting the noise control method. Eshaghi in his study that was conducted for selecting the best noise control solution in a glass factory used the AHP method. The results indicated that efficiency had the maximum relative weight or the most important criterion and cost had the minimum relative weight or in other words the least important criterion among the studied criteria.²⁸ In a similar study conducted by Sekhavati in the cement industry, initial investment cost was determined as the most significant criterion for selecting the noise control method.²⁹

In both studies, exact words were used in the AHP method for performing pairwise comparisons between the criteria. An important disadvantage for the conventional hierarchical analysis method is that experts and decision-makers cannot clearly and conclusively express their opinion about the superiority of one criterion over another due to uncertainty and fuzzyness and using accurate numbers to make pairwise comparisons increase the possibility of errors in pairwise comparisons. Thus, using fuzzy analytic hierarchy technique as a powerful and scientific tool can be recommended for correcting possible errors in pairwise comparisons.^{30, 31} Nasiri indicated that the confinement of noise generating sources

significantly reduces the pressure level, but the limitations of this method should be considered.⁸ A study by Golmohammadi et al. revealed that building an acoustic chamber on noise generating sources can reduce noise exposure.³² In this study, it was found that building acoustic chambers on noise generating sources is one of the most effective solutions for noise control in the catalytic conversion unit. The results of a study by Moradi et al. conducted in the distillation unit of an oil refinery indicated that building a chamber for noise control is the first priority among the current control solutions that is consistent with the present study.²⁶ The limitation of the present study was that the internal relationship among the criteria was neglected and it was assumed that the weight of criteria would be calculated and compared to the results of the present study using multi-criteria decision making methods such as ANP which can analyze the internal relationships among the criteria.

Conclusion

This study proposed a decision-making model based on multi-criteria decision models which can be used as a scientific method for selecting the most appropriate noise control solution in the industry, considering different criteria and strategies. This model can be used for selecting a noise control solution in other industries where there is exposure with a noise higher than the allowed limit and require control solutions.

Acknowledgements

This study was taken from a research project with ethics code IR.BEH.REC.1397.021. The authors would like to appreciate all the experts and employees of the refinery, participating in this study.

References

1. Saylor SK, Roberts BJ, Manning MA, Sun K, Neitzel RL. Patterns and trends in OSHA occupational noise exposure measurements from 1979 to 2013. *Occupational and environmental medicine*. 2019;76(2):118-24.

2. Oh M, Shin K, Kim K, Shin J. Influence of noise exposure on cardiocerebrovascular disease in Korea. *Science of the total environment*. 2019;651:1867-76.
3. Wolfenden AD, Slabbekoorn H, Kluk K, de Kort SR. Aircraft sound exposure leads to song frequency decline and elevated aggression in wild chaffinches. *Animal ecology*. 2019;88(11):1720-31.
4. Zhou F, Shrestha A, Mai S, Tao Z, Li J, Wang Z, et al. Relationship between occupational noise exposure and hypertension: A cross-sectional study in steel factories. *American journal of industrial medicine*. 2019;62(11):961-8.
5. Wang N, Liu X, Ding L, Ding E, Zhu B. Analysis of lncRNA-mRNA expression pattern in male textile workers with noise-induced hearing loss. *Annals of translational medicine*. 2019;7(20):569.
6. Dehghani M, Pourjabbari A, Ravandi M. Relationship between noise pollution and hearing loss among workers in Sarkhoon Gas Refinery. *Hormozgan medical*. 2012;16(3):181-8. [persian]
7. Mousavi SM, Faghiniya Torshiz Y. Evaluation of noise pollution levels before and after corrective actions in the operational units of tanks and petroleum products transportation in Abadan Oil refining Company. *Iran occupational health*. 2019;16(4):64-73. [persian]
8. Nassiri P, Zare M, Golbabaee F. Evaluation of noise pollution in oil extracting region of Lavan and the effect of noise enclosure on noise abatement. *Iran occupational health*. 2007;4(3):49-56. [persian]
9. Haron Z, Darus N, Yahya K, Halim H, Naadia Mazlan A, Hezmi M, et al. Review on traffic noise problem in Malaysia. *IOP conference series: earth and environmental science*; 2019.
10. South T. *Managing noise and vibration at work*: Routledge; 2013.
11. Bamane P, Kumthekar MB, Sharma OP. Review paper on noise control in industry. Available at: SSRN 3368199. 2019.
12. Mousavi SM, Abbasi M, Yazdanirad S, Yazdanirad M, Khatooni E. Fuzzy AHP-TOPSIS method as a technique for prioritizing noise control solutions. *Noise control engineering*. 2019;67(6):415-21.
13. Lakicevic M, Srdjevic B, Velichkov I. Combining AHP and Smarter in Forestry Decision Making. *Baltic forestry*. 2019;25(1):42-9.
14. Gnanavelbabu A, Arunagiri P. Ranking of MUDA using AHP and Fuzzy AHP algorithm. *Materials Today: Proceedings*. 2018;5(5):13406-12.
15. Abdel-Baset M, Chang V, Gamal A, Smarandache F. An integrated neutrosophic ANP and VIKOR method for achieving sustainable supplier selection: A case study in importing field. *Computers in industry*. 2019;106:94-110.
16. Feng Y, Hong Z, Tian G, Li Z, Tan J, Hu H. Environmentally friendly MCDM of reliability-based product optimisation combining DEMATEL-based ANP, interval uncertainty and Vlse Kriterijumska Optimizacija Kompromisno Resenje (VIKOR). *Information sciences*. 2018;442-443:128-44.
17. Lukovac V, Popović M. Fuzzy Delphi approach to defining a cycle for assessing the performance of military drivers. *Decision making: applications in management and engineering*. 2018;1(1):67-81.
18. Lee S, Seo K-K. A hybrid multi-criteria decision-making model for a cloud service selection problem using BSC, fuzzy Delphi method and fuzzy AHP. *Wireless personal communications*. 2016;86(1):57-75.
19. Zyoud SH, Kaufmann LG, Shaheen H, Samhan S, Fuchs-Hanusch D. A framework for water loss management in developing countries

- under fuzzy environment: Integration of Fuzzy AHP with Fuzzy TOPSIS. *Expert systems with applications*. 2016;61:86-105.
20. Sakthivel G, Saravanakumar D, Muthuramalingam T. Application of failure mode and effect analysis in manufacturing industry-an integrated approach with FAHP-fuzzy TOPSIS and FAHP-fuzzy VIKOR. *International journal of productivity and quality management*. 2018;24(3):398-423.
 21. Abdel-Basset M, Zhou Y, Mohamed M, Chang V. A group decision making framework based on neutrosophic VIKOR approach for e-government website evaluation. *Intelligent & fuzzy systems*. 2018;34(6):4213-24.
 22. Liang D, Zhang Y, Xu Z, Jamaldeen A. Pythagorean fuzzy VIKOR approaches based on TODIM for evaluating internet banking website quality of Ghanaian banking industry. *Applied soft computing*. 2019;78:583-94.
 23. Solangi YA, Shah SAA, Zameer H, Ikram M, Saracoglu BO. Assessing the solar PV power project site selection in Pakistan: Based on AHP-fuzzy VIKOR approach. *Environmental science and pollution research*. 2019;26(29):30286-302.
 24. Wang L, Zhang H-y, Wang J-q, Li L. Picture fuzzy normalized projection-based VIKOR method for the risk evaluation of construction project. *Applied soft computing*. 2018;64:216-26.
 25. Gupta H. Evaluating service quality of airline industry using hybrid best worst method and VIKOR. *Air transport management*. 2018;68:35-47.
 26. Moradirad R, Haghghat M, Yazdanirad S, Hajizadeh R, Shabgard Z, Mousavi SM. Selection of the most suitable sound control method using fuzzy hierarchical technique. *Health and safety at work*. 2019;8(4):371-82. [persian]
 27. Shirali GA, Zareh Sakhvidi MJ. The framework for determining efficiency of noise control method using fuzzy approach. *Jundishapur journal of health sciences*. 2013;4(4):59-67. [Persian]
 28. Mahboobe E, Golmohamadi R, Riahi-Korram M. Prioritizing of noise control methods in the Hamadan glass company by the analytical hierarchy process (AHP). *Occupational health and safety*. 2012;2(1):75-84. [Persian]
 29. Sekhavati E, Mohammadi Zadeh M, Mohammad Fam E, Faghihi Zarendi A. Prioritizing methods of control and reduce noise pollution in Larestan cement Factory using analytical hierarchy process (AHP). *The Journal of Toloo-e-behdasht*. 2014;13(2):156-67. [Persian]
 30. Olivková I. Methodology for assessment of electronic payment systems in transport using AHP method. *International Conference on Reliability and Statistics in Transportation and Communication*; 2017:Springer.
 31. Asghari M, Nassiri P, Monazzam MR, Golbabaee F, Arabalibeik H, Shamsipour A, et al. Weighting Criteria and Prioritizing of Heat stress indices in surface mining using a Delphi Technique and Fuzzy AHP-TOPSIS Method. *Environmental health science and engineering*. 2017;15(1):1.
 32. Golmohamadi R, Aliabadi M, Darvishi E. Enclosure design for noise control of air blower in a typical steel industry. *Iran occupational health*. 2014;11(2):1-12.[Persian]